

SPECIFICATIONS

GNSS Features

Channels.....	1598
GPS.....	L1, L1C, L2C, L2P, L5
GLONASS.....	L1C/A, L1P, L2C/A, L2P, L3*
BDS.....	BDS-2: B1I, B2I, B3I BDS-3: B1I, B3I, B1C, B2a, B2b*
GALILEOS.....	E1, E5A, E5B, E6C, AltBOC*
SBAS(WAAS/MSAS/EGNOS/GAGAN).....	L1*
IRNSS.....	L5*
QZSS.....	L1, L2C, L5*
MSS L-Band.....	BDS-PPP
Positioning output rate.....	1Hz~20Hz
Initialization time.....	< 10s
Initialization reliability.....	> 99.99%

Positioning Precision

Code differential GNSS.....	Horizontal: 0.25 m + 1 ppm RMS Vertical: 0.50 m + 1 ppm RMS
Static(long observations).....	Horizontal: 2.5 mm + 0.1 ppm RMS Vertical: 3 mm + 0.4 ppm RMS
Static.....	Horizontal: 2.5 mm + 0.5 ppm RMS Vertical: 3.5 mm + 0.5 ppm RMS
Rapid static.....	Horizontal: 2.5 mm + 0.5 ppm RMS Vertical: 5 mm + 0.5 ppm RMS
PPK.....	Horizontal: 3 mm + 1 ppm RMS Vertical: 5 mm + 1 ppm RMS
RTK(UHF).....	Horizontal: 8 mm + 1 ppm RMS Vertical: 15 mm + 1 ppm RMS
RTK(NTRIP).....	Horizontal: 8 mm + 0.5 ppm RMS Vertical: 15 mm + 0.5 ppm RMS
RTK initialization time.....	2 ~ 8s
SBAS positioning.....	Typically < 5m 3DRMS
BANDA-L.....	Horizontal: 5-10cm (5-30min) Vertical: 10-30cm (5-30min)
IMU.....	Less than 10mm + 0.7 mm/° tilt to 30°
IMU tilt angle.....	0° ~ 60°

Hardware Performance

Dimension.....	130mm(W) × 130mm(L) × 80mm(H)
Weight.....	790g (battery included)
Material.....	Magnesium aluminum alloy shell
Operating temperature.....	-45°C ~ +75°C
Storage temperature.....	-55°C ~ +85°C
Humidity.....	100% Non-condensing
Waterproof/Dustproof.....	IP68 standard, protected from long time immersion to depth of 1m IP68 standard, fully protected against blowing dust
Shock/Vibration.....	Withstand 2 meters pole drop onto the cement ground naturally MIL-STD 810G
Power supply.....	6-28V DC, overvoltage protection
Battery.....	Inbuilt 7.2V 6800mAh rechargeable, Li-ion battery
Battery life.....	15h(Rover Bluetooth mode)

WIFI

Modem.....	802.11 b/g standard
WIFI hotspot.....	AP mode, Receiver broadcasts its hotspot form web UI accessing with any mobile terminals
WIFI datalink.....	Client mode, Receiver can transmit and receive correction data stream via WIFI datalink

Items marked with * will be upgraded along with the update of assigned firmware version

The data comes from the SOUTH GNSS Product Laboratory, and the specific situation is subject to local actual usage.

Communications

I/O Port.....	5-PIN LEMO external power port + RS232 Type-C(charge, OTG to USB disk, data transfer with PC or phone, Ethernet)
Internal UHF.....	1 UHF antenna TNC interface .2W radio, receive and transmit, radio router and radio repeater
Frequency range.....	410 - 470MHz
Communication protocol.....	Farlink, Trimtalk450s, SOUTH, HUACE, Hi-target, Satel
Communication range.....	Typically 8km with Farlink protocol
Bluetooth.....	Bluetooth 3.0/4.1 standard, Bluetooth 2.1 + EDR
NFC Communication.....	Realizing close range (shorter than 10cm) automatic pair between receiver and controller (controller requires NFC wireless communication module else)

Data Storage/Transmission

Storage.....	4GB SSD Automatic cycle storage (The earliest data files will be removed automatically while the memory is not enough) Support external USB storage
Data transmission.....	Plug and play mode of USB data transmission Supports FTP/HTTP data download
Data format.....	Static data format: STH, Rinex2.01, Rinex3.02 and etc. Differential format: RTCM 2.3, RTCM 3.0, RTCM 3.1, RTCM 3.2 GPS output data format: NMEA 0183, PJK plane coordinate, SOUTH Binary code Network model support: VRS, FKP, MAC, fully support NTRIP protocol

Sensors

Electronic bubble.....	Controller software can display electronic bubble, checking leveling status of the carbon pole in real-time
IMU.....	Built-in IMU module, calibration-free and immune to magnetic interference
Thermometer.....	Built-in thermometer sensor, adopting intelligent temperature control technology, monitoring and adjusting the receiver temperature

User Interaction

Operating system.....	Linux
Buttons.....	One button
Indicators.....	5 LED indicators(Satellite, Charging, Power, Datalink, Bluetooth)
Web interaction.....	With the access of the internal web interface management via WiFi or USB connection, users are able to monitor the receiver status and change the configurations freely
Voice guidance.....	It provides status and operation voice guidance, and supports Chinese/English/Korean/Spanish/Portuguese/Russian/Turkish
Secondary development.....	Provides secondary development kit, and opens the OpenSIC observation data format and interaction interface definition
Cloud service.....	The powerful cloud platform provides online services like remote manage, firmware update, online register and etc.



SOUTH
Target your success



— Supercharged Pocket RTK —



SOUTH
Target your success

OFICINA CENTRAL: Av. Blanco Galindo N° 2714, esquina Adrián Patiño, Cercado, Cochabamba

SUCURSAL 1: Calle Sucre casi Calle Barrientos s/n, Colomi

SUCURSAL 2: Plaza principal Cliza casi Calle Aroma, Cliza

Telf.: 71481573 - 76997450 - 67405575 Correo: gygtechnical@gmail.com

Cochabamba-Bolivia

The colorful LED indicators can briefly show the current status.



tracking Satellites

Green Indicator flashes when tracking satellites

receiving corrections

When receiving corrections, Green Indicator flashes, otherwise the Red indicator flashes



ON

Red indicator will on when receiver turning on

Bluetooth

Blue Indicator will on when connecting

external power

when connecting to external power, Red indicator will on. if the battery has been fully charged, Green Indicator will on.

Only **790g** in weight, G3 is still packaged with the magnesium alloy shell. Highly intergrated design, smaller and lighter, easy to use in the field.

Battery life checking:

we can quickly check the battery life by pressing the button, after pressing the button, some of the Indicators will turn on.



100%~75%

75%~50%

50%~25%

25% >




Galaxy G3 is a new product from **SOUTH SoC** platform, most components of G3 (GNSS module, Wi-Fi, Bluetooth, etc.) are integrated on one circuit board. G3 has lower power consumption, and efficiently improves the ability of receiving higher quality satellites signals.

Powered by the new SoC GNSS board, new generation sensitivity satellite antenna, new ROS platform and GNSS RTK engine, G3 can fully track GPS, GLONASS, BDS, GALILEO and QZSS to obtain centimeter-level positioning in few seconds.

Now G3 supports the BeiDou-3 B2b L-band BDS-PPP corrections to get real-time centimeter level positioning services.

Thanks to the new function **"Fixed-keep"**, now it is possible for G3 to keep centimeter-level accuracy for few minutes when the RTK corrections is missing.

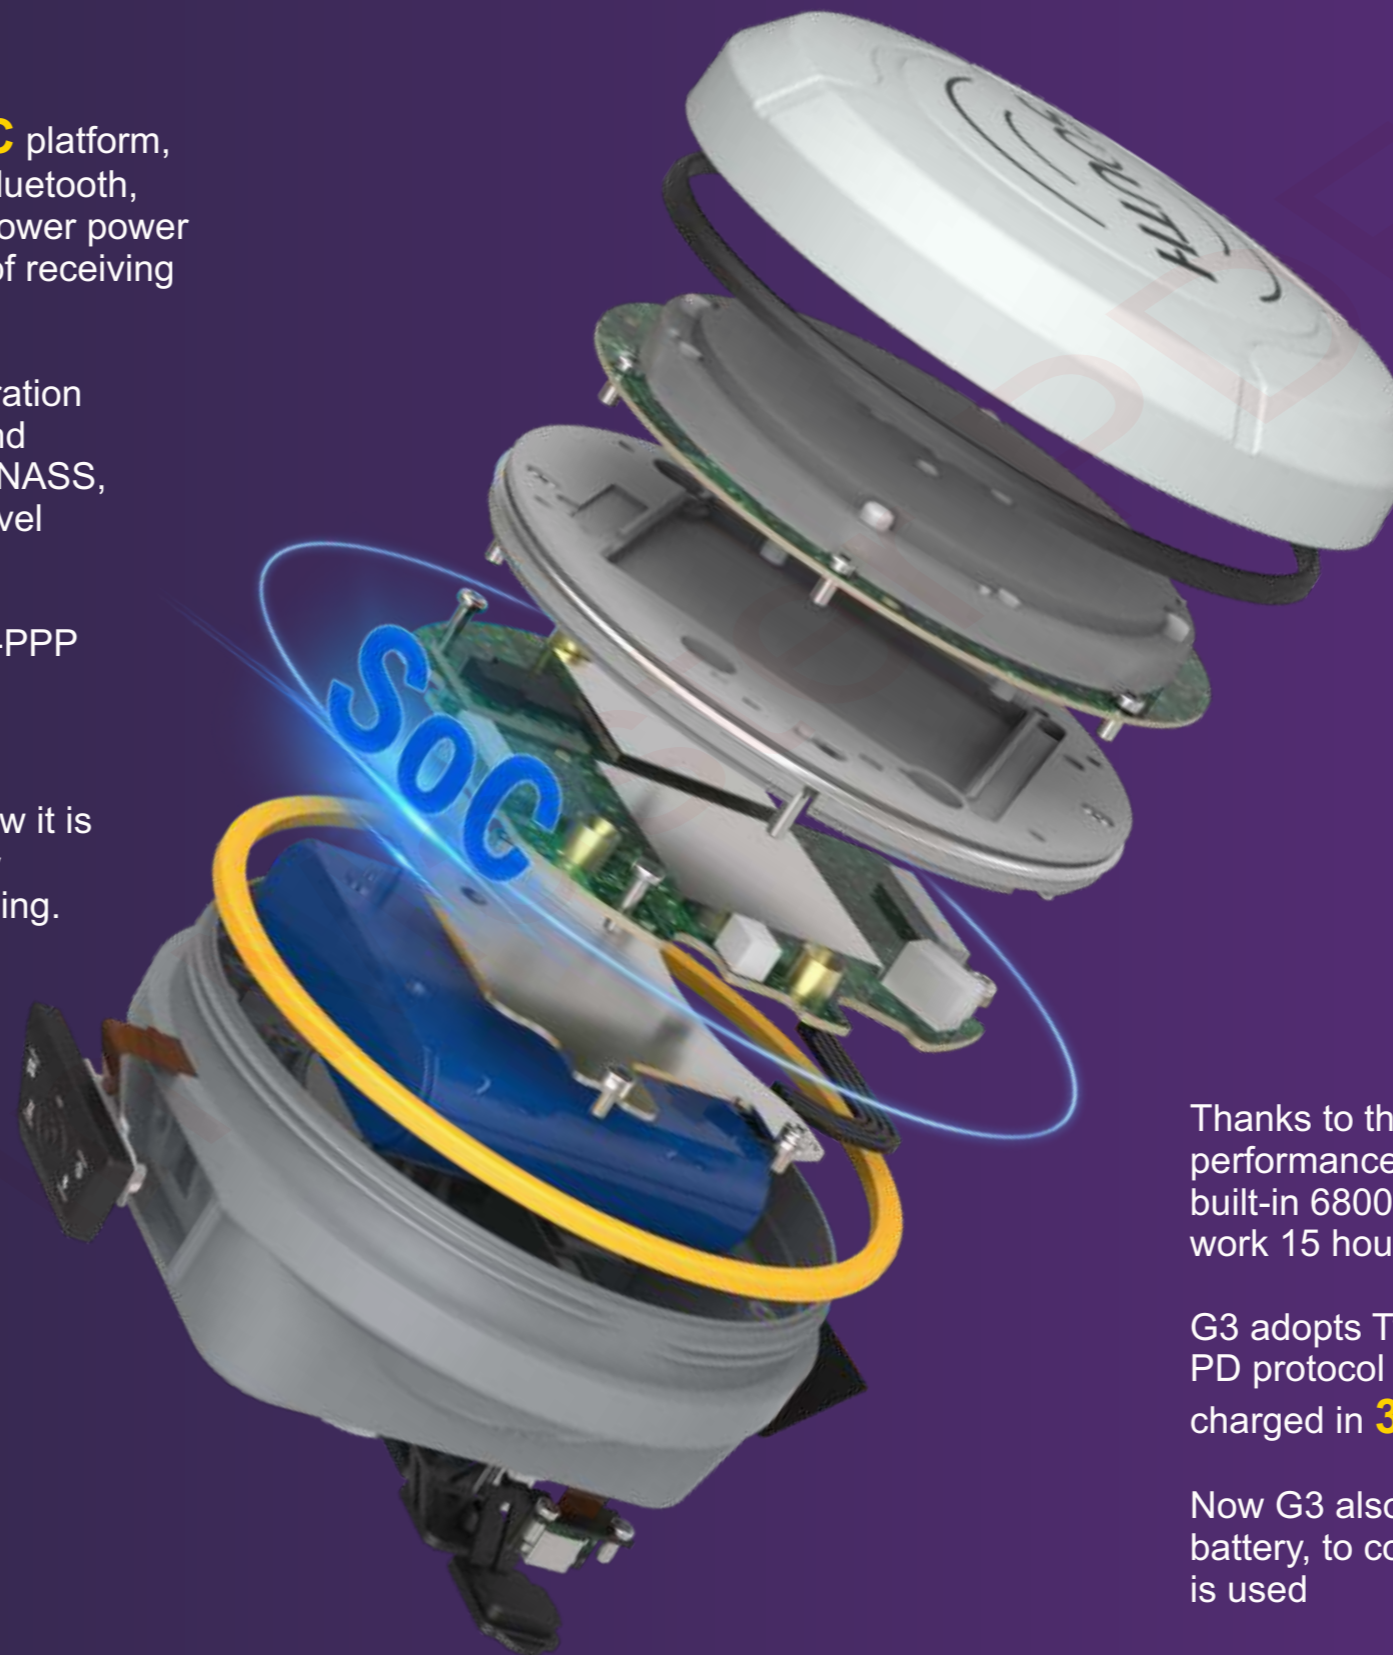

Thanks to the SOC technology, G3 achieves higher performance and lower power consumption. The built-in 6800mAh Li-ion battery can continuously work 15 hours (Rover Bluetooth mode).

G3 adopts Type-C charging interface which supports PD protocol quickly charging, the battery can be fully charged in **3 hours** and then supports full-day work.

Now G3 also supports the external phone portable battery, to continue the work even internal battery is used

Galaxy G3 is intergrated with the latest **Inertial Measurement Unit (IMU)**. Featured with anti-magnetic chracteristic, you can start the tilt survey in any place. Shaking to initialize the IMU sensor, no need to calibrate. Up to 200Hz IMU data output rate, boosting the speed of field work.



Galaxy G3 is packaged with SOUTH "Beaver" super radio and the exclusive **"Farlink"** protocol. The "Beaver" super radio is more power saving, "Farlink" protocol has larger bandwidth. The combination of "Beaver" super radio and "Farlink" protocol makes better performance on signal capturing.



Av. Blanco Galindo N° 2714, esquina Adrián Patiño
Telf.: 76997450-75487501
Correo: gygtechnical@gmail.com - amarcanad@gmail.com
Cochabamba-Bolivia