

SOKKIA

MADE TO FIT YOUR WORLD.

Manual Total Station

FX-200



 **71481573 - 76997450**
 **gygtechnical@gmail.com**



CENTRAL: Avenida Blanco Galindo km3.5
lado Surtidor Los Alamos.

SUCURSAL 1: Calle Sucre s/n, Colomi

SUCURSAL 2: Plaza Principal GAM casi calle
Aroma, CLIZA.



Great performance in a compact size

Take charge of job sites with world-class accuracy, the FX is ready for whatever you need to accomplish. This professional-grade advanced total station provides an on-board data collection interface, long-range communication, and an incredibly powerful EDM.

Like all of our solutions, you can customize it to meet your needs and create your own workflows.

- Lightweight, compact body
- RED-tech technology reflectorless EDM
- Long-range Bluetooth® technology
- Advanced angle measurement system
- Long-lasting battery
- Waterproof, rugged, and user-friendly

Precise positioning

The FX series features our best-in-class absolute encoders that provide long-term reliability in any job site condition. Dual-axis compensator ensures stable measurements even when set up on uneven terrain. And our traditional motion clamp and tangent screw are employed to ensure stable angle measurement.

The FX-201 model feature groundbreaking IACS (Independent Angle Calibration System) technology for extremely reliable angle measurement.

On-board control

Increase your productivity with the Windows® on-board operating system and touch screen computer. The large, bright screen provides enough resolution to view points, lines, and icons so you can see and react quicker. And you can move your projects along faster by being able to do point collection, description entry, and on-screen calculations right on the instrument.



GLOBAL Y GEOSISTEM

Long-range flexibility

For stakeout and other tasks where being at the prism pole with a field controller is critical, the FX series features Bluetooth® Class 1.5 wireless technology. All FX data is instantly available on your Bluetooth® equipped controller.



Get more out of your day



With one battery providing more than 20 hours of power, you'll be able to get through even the longest day in the field.



Dynamic software

With on-board MAGNET Field software running on a Windows® operating system and a touch screen color display, the FX-200 provides an easy-to-use manual total station with high performance capabilities. MAGNET software features a user-friendly interface and enables fast and productive workflows.



 **71481573 - 76997450**
 **gygtechnical@gmail.com**



GLOBAL Y GEOSISTEM




**CENTRAL: Avenida Blanco Galindo km3.5
lado Surtidor Los Alamos.**

SUCURSAL 1: Calle Sucre s/n, Colomi

**SUCURSAL 2: Plaza Principal GAM casi calle
Aroma, CLIZA.**

RED-tech technology reflectorless EDM

- Fast distance measurement of 0.9 s regardless of object
- Pinpoint precision in reflectorless distance measurement
- Reflectorless operation from 30 cm to 1000 m
- Coaxial EDM beam and laser-pointer provide fast and accurate aiming
- Ensures accuracy even with reflective sheets

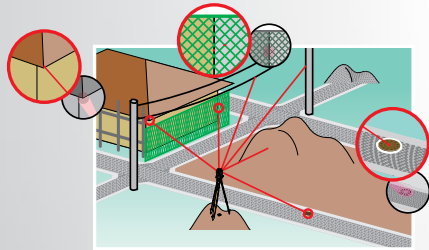

Job site ready

- Waterproof / dustproof IP65 rating design handles the toughest environments
- Metal chassis and heavy-duty handle
- Standard usage temperature range of -20 to 60°C (-4 to 140°F)

Specifications

MODEL	FX-201	FX-203	FX-205
Telescope			
Magnification / Resolving power	30x / 2.5"		
Length	171 mm		
Objective aperture	45 mm (48 mm for EDM)		
Image	Erect		
Field of view	1°30' (26 m/1,000 m)		
Minimum focus	1.3 m		
Reticle illumination	5 brightness levels		
Display resolution			
Accuracy (ISO 17123-3:2001)	0.5" / 1"	1" / 5"	
Dual-axis compensator / Collimation compensation	1" (0.3 mgon)	3" (1.0 mgon)	5" (1.5 mgon)
	Dual-axis liquid tilt sensor, working range: ±6" (±111 mgon) / Collimation compensation available		
Laser output*1			
Measuring range (under average conditions*2)			
Reflectorless mode	Up to 1000 m (3,280 ft.*6)		
Prism or sheet mode			
Reflectorless*3	RS90N-K: 1.3 to 500 m (1,640 ft.), RS50N-K: 1.3 to 300 m (980 ft.), RS10N-K: 1.3 to 100 m (320 ft.)		
Reflective sheet*4/*5	1.3 to 500 m (1,640 ft.)		
Mini prisms (Prism-5)	1.3 to 5,000 m (16,400 ft.)		
Standard prism (Prism-2)	Reflectorless*3: (3 + 2 ppm x D) mm*7 (0.3 to 200m)		
Distance accuracy*2 (ISO 17123-4:2001) (D=measuring distance in mm)	Reflective sheet*4: (2 + 2 ppm x D) mm Standard prism: (1.5 + 2 ppm x D) mm		
Measuring time*8	Fine measurement	Less than 1.5 sec + every 0.9 sec or less	
	Rapid measurement	Less than 1.3 sec + every 0.6 sec or less	
	Tracking measurement	Less than 1.3 sec + every 0.4 sec or less	
OS, Interface and Data management			
Operating system	Color 3.5 inch QVGA TFT LCD		
Display			
Control panel location*9	Dual Display	Single Display	
Data storage	Internal memory	1 GB internal memory (includes memory for program files)	
	Plug-in memory device	USB flash memory (max. 32GB)	
Interface	Serial RS-232C, USB 2.0 (Type A / mini B)		
Bluetooth® modem (optional)*10	Bluetooth® Class 1.5 Operating range: up to 100 m Coaxial red laser using EDM beam		
General			
Laser-pointer*11			
Guide light*11	Green LED (524 nm) and Red LED (626 nm), Operating range: 1.3 to 150 m*2		
Levels	Graphic	6' (Inner Circle)	
	Circular level	10' / 2 mm	
Optical plummet	Magnification	3x	
	Minimum focus	0.3 m from tribrach bottom	
Laser plummet (optional)	Red laser diode (635 nm ±10 nm), Beam accuracy: <1.0 mm at 1.3 m, Class 2 laser product		
Dust/Water Rating	IP65 (IEC 60529:2001)		
Operating temperature*12	Standard models	-20 to 60°C (-4 to 140°F)	
	Low temp. models	-30 to 50°C (-22 to 122°F)	
Size with handle*9	Two displays	191 x 190 x 348 mm	
	One display (5" model)	191 x 174 x 348 mm	
Weight with battery and tribrach	Approx. 5.7 kg (12.3 lb.)		

*1 IEC60825-1: Ed.2.0:2007 / FDA CDRH 21 CFR Part 1040.10 and 11 *2 Average conditions: Slight haze, visibility about 20 km (12 miles), sunny periods, weak scintillation. *3 Fine mode. With Kodak Gray Card White Side (90% reflective). When brightness on measured surface is 30,000 lx. or less. Reflectorless range/accuracy may vary according to measuring objects, observation situations and environmental conditions. *4 When the measuring beam's incidence angle is within 30° in relation to the reflective sheet target. *5 Measuring range in temperatures of -30 to -20°C (-22 to -4°F) with Low Temperature models and 50 to 60°C (122 to 140°F) with High Temperature models: RS90N-K: 1.3 to 300 m (4.3 to 980 ft.), RS50N-K: 1.3 to 180 m (4.3 to 590 ft.), RS10N-K: 1.3 to 60 m (4.3 to 190 ft.) *6 Good conditions: No haze, visibility about 40 km (25 mi.), overcast, no scintillation. *7 Measuring range: 0.3 to 200m *8 Typical, under good conditions. Reflectorless measurement time may vary according to measuring objects, observation situations and environmental conditions. *9 Control panel location may vary depending on region or model. *10 Usage approval of Bluetooth® wireless technology varies according to country. Please consult your local office or representative in advance. *11 The laser-pointer and the guide light do not work simultaneously. *12 Low Temperature models: -30 to 50 °C (-22 to 122°F) and High Temperature models: -20 to 60°C (-4 to 140°F, No direct sunlight) are available on built-to-order basis.

Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Sokkia is under license. Other trademarks and trade names are those of their respective owners.

SOKKIA

sokkia.com

Specifications subject to change without notice
©2021 Topcon Corporation All rights reserved.
SOK-1052 Rev A 5/21

71481573 - 76997450
gygtechnical@gmail.com